


Loop and Support Kit No. 508-090-02. Instructions for assembly.

Section Dimension	A	B	C
C175	200	B	350
C193	200	B	350
C211	200	B	350
C227	200	B+15	350
C245	200	B+35	350
C264	200	B+50	350
C285	200	B+80	350
F176	200	B-10	350
F194	200	B-10	350
F212	200	B-10	350
F228	200	B+35	350
F246	200	B+35	350
F265	200	B+50	350
F286	200	B+80	350

Section Dimension	A	B	C
155/104	150	B	350
170/115	100	B	350
177/124	100	B	350
189/132	100	B	350
206/139	100	B	350
224/150	100	B	350
237/162	100	B	350
190/94	190	B+15	350
213/104	190	B+15	350
235/116	190	B+10	350
232/126	190	B+45	350
260/136	100	B+25	350

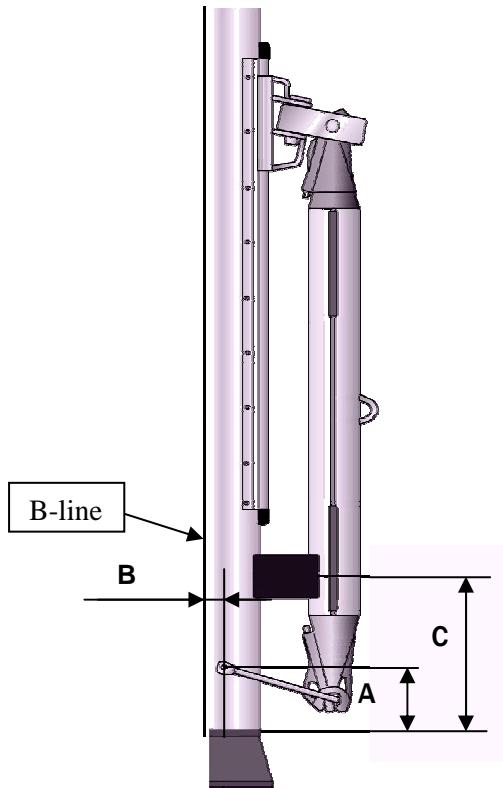

1. Mark the position of the holes for the loop. Use a tape measure for dimension B.
2. Adjust the loop in a vice acc. to the figure. There should be a total play of about 5 mm between the loop and the mast.
3. Check that the loop does not interfere with deck hardware etc.
4. Drill two ø6.5 holes. Fit the plastic washers between the loop and the mast and rivet the loop to the mast. Punch out the mandrel heads.
5. Drill and tap the M8-holes (c/c 20 mm) for the support. Apply locking adhesive to the screws and fit the support.

CAUTION: Cables and halyards inside mast.

To avoid damage when drilling holes, use a depth stopper on the drill bit.

