Petersen Stainless Rigging Limited Cowen Road, Blaydon on Tyne Tyne & Wear, NE21 5TW

t: +44 (0)191 4140156 f: +44 (0) 191 4990041 e:sales@petersen-stainless.co.uk www.petersen-stainless.co.uk




TURNBUCKLES Closed Body with Stud and Fork

Benefits

Stainless steel grade 316 closed body with Aluminium Bronze thread inserts for sizes 8mm to 26mm.

Eyes are manufactured to a very high standard using the latest technology in electrical upsetting forging.

All raw materials used to manufacture these parts are certified to EN10204 3.1b.

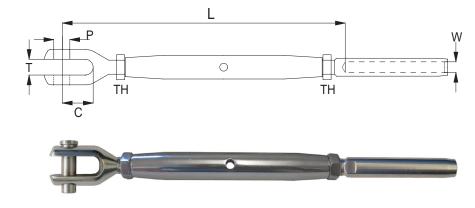

Inspection certificate BS EN 10204 3.1B available on request (This must be specified at the time of order). High quality finish and excellent polish.

Closed Body Turnbuckle with Fork and Fork										
Product Code	Wire	Thread	Р	С	F	Т	OD	Min L	Max L	Weight
RSSF03	3mm	1/4" unf	6.0mm	12.5mm	7mm	6.2mm	14.3mm	125mm	195mm	79g
RSSF04DS	4mm	1/4" unf	6.0mm	12.5mm	7mm	6.2mm	14.3mm	126mm	196mm	80g
RSSF04	4mm	5/16" unf	8mm	17mm	9mm	7.9mm	18.0mm	150.5mm	228.5mm	151g
RSSF04US	4mm	3/8" unf	9.5mm	19mm	11mm	9.9mm	22.2mm	184mm	284mm	152g
RSSF05DS	5mm	5/16" unf	8mm	17mm	9mm	7.9mm	18.0mm	153.5mm	231.5mm	153g
RSSF05	5mm	3/8" unf	9.5mm	19mm	11mm	9.9mm	22.2mm	184mm	284mm	257g
RSSF05US	5mm	7/16" unf	11.0mm	22mm	12mm	10.9mm	25.4mm	200mm	308mm	260g
RSSF06DS	6mm	3/8" unf	9.5mm	19mm	11mm	9.9mm	22.2mm	187mm	287mm	261g
RSSF06	6mm	7/16" unf	11.0mm	22mm	12mm	10.9mm	25.4mm	202mm	310mm	386g
RSSF06US	6mm	1/2" unf	12.0mm	25mm	15mm	12.7mm	28.6mm	236mm	368mm	450g
RSSF07	7mm	1/2" unf	12.0mm	25mm	15mm	12.7mm	28.6mm	236mm	368mm	591g
RSSF08DS	8mm	1/2" unf	12.0mm	25mm	15mm	12.7mm	28.6mm	239mm	371mm	625g
RSSF08US	8mm	5/8" unf	16mm	32mm	18mm	15.8mm	34.1mm	310mm	466mm	1185g
RSSF10	10mm	5/8" unf	16mm	32mm	18mm	15.8mm	34.1mm	312mm	468mm	1340g
RSSF10US	10mm	3/4" unf	19mm	38mm	23mm	17.8mm	47.6mm	359.5mm	530.5mm	1950g
RSSF12	12mm	3/4" unf	19mm	38mm	23mm	17.8mm	47.6mm	361mm	532mm	2218g
RSSF14	14mm	7/8" unf	22.0mm	45mm	26mm	22.0mm	54.0mm	403mm	600mm	3376g
RSSF16	16mm	1" unf	25.4mm	50mm	30.5mm	25.0mm	63.5mm	472mm	711mm	4925g
RSSF19	19mm	1 1/8" unf	28.0mm	58mm	32mm	28.2mm	69.9mm	531mm	801mm	5318g
RSSF22	22mm	1 1/4" unf	32mm	64mm	39mm	31.8mm	76.2mm	575mm	859mm	7711g
RSSF26	26mm	1 3/8" unf	35mm	70mm	43.5mm	34.9mm	82.5mm	655mm	979mm	14085g
Threaded ends can be purchased seperately - Forks, Eyes, Compression Studs, Swage Studs, Toggles and Shackle Toggles.										

All Hi-MOD products are produced to a high degree of quality control, using modern lean manufacturing processes, resulting in a reliable and consistent product